



Product Service


CERTIFICATE

No. Z2 099333 0092 Rev. 06

Holder of Certificate: **LONGi Green Energy Technology Co., Ltd.**

No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

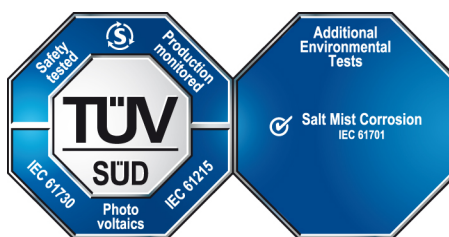

Product:

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704062103402-06

Valid until: 2029-04-27

Date, 2025-01-03

(Zhulin Zhang)

CERTIFICATE

No. Z2 099333 0092 Rev. 06

Model(s):

LR4-72HPH-xxxM, (xxx=420-465, in step of 5)
LR4-72HIH-xxxM, (xxx=420-465, in step of 5)
LR4-60HPH-xxxM, (xxx=350-380, in step of 5)
LR4-60HIH-xxxM, (xxx=350-380, in step of 5)
LR4-66HPH-xxxM, (xxx=395-425, in step of 5)
LR4-66HIH-xxxM, (xxx=395-425, in step of 5)
LR5-72HPH-xxxM, (xxx=525-575, in step of 5)
LR5-66HPH-xxxM, (xxx=480-530, in step of 5)
LR5-72HIH-xxxM, (xxx=525-575, in step of 5)
LR5-66HIH-xxxM, (xxx=480-530, in step of 5)
LR5-54HPH-xxxM, (xxx=395-435, in step of 5)
LR5-54HIH-xxxM, (xxx=395-435, in step of 5)
LR5-60HPH-xxxM, (xxx=435-480, in step of 5)
LR5-60HIH-xxxM, (xxx=435-480, in step of 5)
LR5-72HBD-xxxM, (xxx=500 to 565, in step of 5)
LR5-66HBD-xxxM, (xxx=475 to 515, in step of 5)
LR5-60HBD-xxxM, (xxx=435 to 470, in step of 5)
LR5-54HBD-xxxM, (xxx=390 to 425, in step of 5)
LR5-72HGD-xxxM, (xxx=540 to 590, in step of 5)
LR7-72HGD-xxxM, (xxx=565 to 625, in step of 5)
LR7-72HYD-xxxM, (xxx=625 to 660, in step of 5)
LR7-72HVD-xxxM, (xxx=625 to 660, in step of 5)
LR8-66HGD-xxxM, (xxx=595 to 625, in step of 5)
LR8-66HYD-xxxM, (xxx=625 to 650, in step of 5)
xxx stands for rated output power at STC.

Parameters:

Test method of salt mist test:

Safety Class:

Fire Safety Class:

Maximum System Voltage:

Construction:

Test method 8.

Class II

Class C according to UL790

1500 V DC

Framed or frameless,
with Junction box,
cable and connectors.

Tested according to:

IEC 61215-1:2021
IEC 61215-1-1:2021
IEC 61215-2:2021
IEC 61730-1:2023
IEC 61730-2:2023
IEC 61701:2020